

## Anex

Montech Titan Gold 850W

Lab ID#: MT85002126  
 Receipt Date: Jan 20, 2023  
 Test Date: Feb 2, 2023

Report: 23PS2126A  
 Report Date: Feb 10, 2023

### DUT INFORMATION

Brand	Montech
Manufacturer (OEM)	CWT
Series	Titan
Model Number	TIS0124
Serial Number	TTTAN850221100504
DUT Notes	

### DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	50-60
Rated Frequency (Hz)	5-12
Rated Power (W)	850
Type	ATX12V
Cooling	135mm Fluid Dynamic Bearing Fan (HA13525H12SF-Z)
Semi-Passive Operation	✓ (selectable)
Cable Design	Fully Modular

### TEST EQUIPMENT

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 63640-80-80 x10 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P
Power Analyzers	RS HMC8015, N4L PPA1530, N4L PPA5530
Oscilloscopes	Picoscope 4444, Rigol DS7014, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A, Keithley 2015 - THD
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Isolation Transformer	4kVA

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/16

## Anex

## Montech Titan Gold 850W

### RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓
ATX 3.0 Ready	✓

### 115V

Average Efficiency	88.852%
Efficiency With 10W (≤500W) or 2% (>500W)	75.641
Average Efficiency 5VSB	79.000%
Standby Power Consumption (W)	0.0143000
Average PF	0.988
Avg Noise Output	24.29 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

### 230V

Average Efficiency	90.818%
Average Efficiency 5VSB	78.034%
Standby Power Consumption (W)	0.0686000
Average PF	0.964
Avg Noise Output	24.13 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

### POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	22	22	70.8	3	0.3
	Watts	120		850	15	3.6
Total Max. Power (W)		850				

### HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	19.6
AC Loss to PWR_OK Hold Up Time (ms)	17.2
PWR_OK Inactive to DC Loss Delay (ms)	2.4

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### CABLES AND CONNECTORS

#### Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (600mm)	1	1	16-18AWG	No
4+4 pin EPS12V (700mm)	1	1	16AWG	No
8 pin EPS12V (700mm)	1	1	16AWG	No
6+2 pin PCIe (500mm+150mm)	2	4	16-18AWG	No
12+4 pin PCIe (600mm) (600W)	1	1	16-24AWG	No
SATA (500mm+150mm+150mm+150mm)	3	12	18AWG	No
4-pin Molex (500mm+150mm+150mm+150mm)	1	4	18AWG	No
AC Power Cord (1400mm) - C13 coupler	1	1	18AWG	-


All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

#### Efficiency: Montech Titan Gold 850W

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

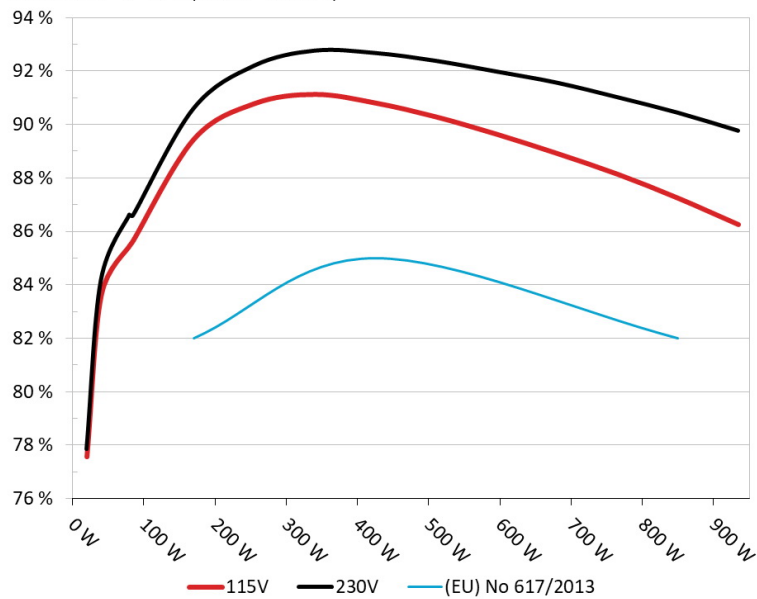


#### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

### 5VSB EFFICIENCY

#### 5VSB Efficiency: Montech Titan Gold 850W

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

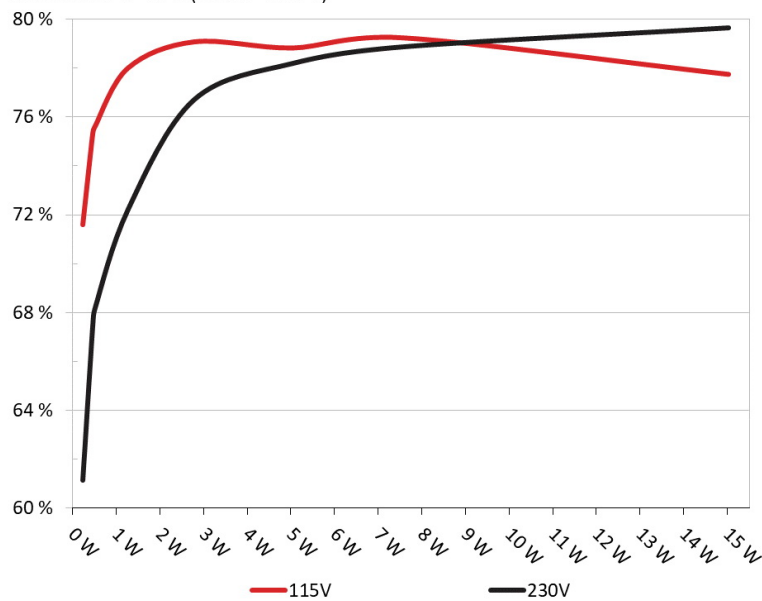

#### INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### 5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.228W	71.607%	0.031
	5.064V	0.318W		114.88V
2	0.09A	0.456W	75.335%	0.058
	5.063V	0.605W		114.88V
3	0.55A	2.78W	79.072%	0.268
	5.054V	3.516W		114.87V
4	1A	5.046W	78.821%	0.376
	5.046V	6.402W		114.87V
5	1.5A	7.556W	79.238%	0.428
	5.037V	9.536W		114.87V
6	3A	15.03W	77.746%	0.504
	5.01V	19.331W		114.86V

### 5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.228W	61.147%	0.011
	5.064V	0.373W		229.9V
2	0.09A	0.456W	67.475%	0.019
	5.063V	0.676W		229.9V
3	0.55A	2.78W	76.702%	0.1
	5.055V	3.625W		229.89V
4	1A	5.046W	78.188%	0.167
	5.046V	6.452W		229.89V
5	1.5A	7.556W	78.86%	0.228
	5.038V	9.582W		229.89V
6	3A	15.03W	79.638%	0.331
	5.01V	18.873W		229.89V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Montech Titan Gold 850W


# 115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

**PAGE 6/16**


#### EFFICIENCY GRAPH 115V

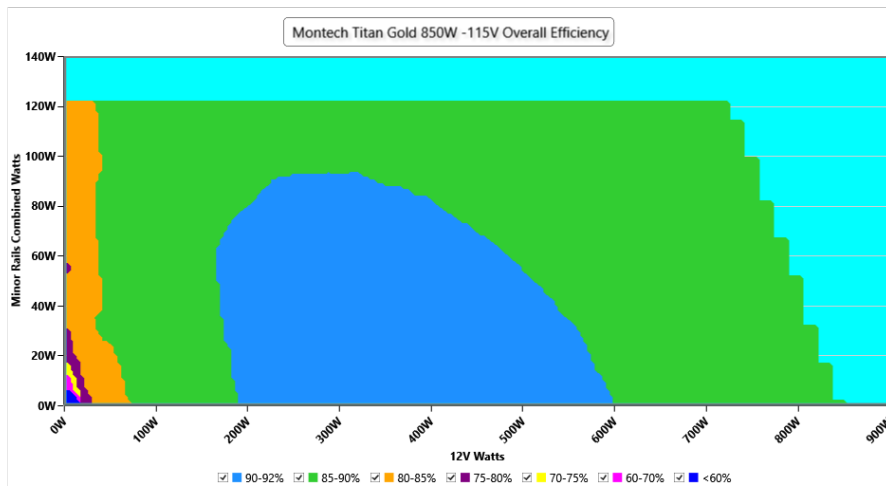

#### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

#### NOISE GRAPH 115V

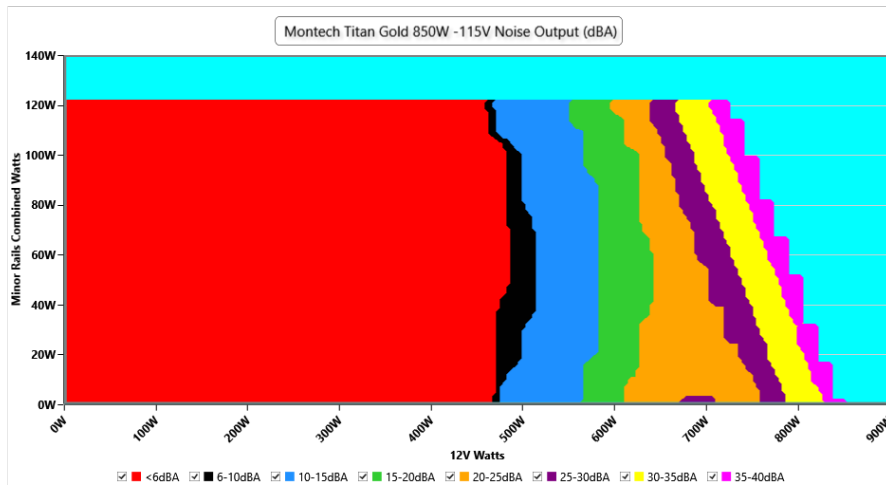

#### INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### VAMPIRE POWER -115V

#### Detailed Results

	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	114.87 V	114.82 V	113.85 V	114.89 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	60.00 Hz	59.40 Hz	60.02 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.416	1.416	1.340	1.418	1.490	PASS
Mains Voltage THD:	0.14 %	0.12 %	N/A	0.17 %	2.00 %	PASS
Real Power:	0.014 W	0.012 W	N/A	0.016 W	N/A	N/A
Apparent Power:	10.316 W	10.293 W	N/A	10.341 W	N/A	N/A
Power Factor:	0.001	N/A	N/A	N/A	N/A	N/A

#### INFO

*This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing*

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case



### 10-110% LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	5.194A	1.985A	2.011A	0.991A	84.995	85.65%	0	<6.0	44.77°C	0.974
	12.204V	5.036V	3.282V	5.045V	99.235				40.53°C	114.85V
20%	11.390A	2.979A	3.019A	1.191A	169.913	89.436%	0	<6.0	45.31°C	0.985
	12.206V	5.035V	3.279V	5.037V	189.983				40.66°C	114.81V
30%	17.947A	3.476A	3.524A	1.371A	254.905	90.771%	0	<6.0	46.22°C	0.989
	12.195V	5.035V	3.277V	5.107V	280.821				41.07°C	114.79V
40%	24.545A	3.972A	4.03A	1.567A	339.982	91.118%	0	<6.0	47.36°C	0.991
	12.172V	5.034V	3.275V	5.107V	373.122				41.79°C	114.76V
50%	30.786A	4.967A	5.041A	1.765A	424.709	90.797%	445	<6.0	42.38°C	0.99
	12.155V	5.033V	3.273V	5.099V	467.76				48.28°C	114.73V
60%	37.027A	5.961A	6.054A	1.964A	509.243	90.282%	567	11.1	42.82°C	0.991
	12.138V	5.032V	3.27V	5.092V	564.053				49.25°C	114.71V
70%	43.345A	6.956A	7.069A	2.163A	594.552	89.631%	766	20.4	43.15°C	0.992
	12.122V	5.032V	3.268V	5.084V	663.335				50.17°C	114.67V
80%	49.688A	7.952A	8.083A	2.265A	679.434	88.912%	944	27.3	43.71°C	0.993
	12.106V	5.03V	3.266V	5.077V	764.161				51.76°C	114.65V
90%	56.427A	8.451A	8.58A	2.366A	764.873	88.131%	1231	35.6	44.12°C	0.994
	12.093V	5.029V	3.263V	5.071V	867.879				53.17°C	114.61V
100%	62.866A	8.95A	9.109A	2.967A	849.706	87.235%	1585	42.3	45.53°C	0.994
	12.089V	5.028V	3.26V	5.055V	974.04				55.57°C	114.58V
110%	69.179A	9.949A	10.221A	2.97A	934.305	86.248%	1819	43.4	46.83°C	0.995
	12.085V	5.026V	3.257V	5.05V	1083.279				57.76°C	114.55V
CL1	1.966A	14.351A	14.578A	0.496A	146.415	84.346%	447	<6.0	42.5°C	0.984
	12.214V	5.032V	3.272V	5.044V	173.589				47.97°C	114.82V
CL2	1.964A	21.207A	1.006A	0.495A	136.421	83.178%	446	<6.0	42.4°C	0.983
	12.223V	5.028V	3.279V	5.05V	164.011				49.43°C	114.83V
CL3	1.964A	0.992A	20.712A	0.495A	99.095	80.595%	445	<6.0	42.48°C	0.979
	12.221V	5.043V	3.264V	5.046V	122.957				51.56°C	114.84V
CL4	69.398A	0.993A	1.01A	0.489A	849.814	88.008%	1314	37.9	44.46°C	0.994
	12.090V	5.036V	3.266V	5.107V	965.617				55.37°C	114.59V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### 20-80W LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.219A	0.494A	0.501A	0.198A	19.987	77.561%	0	<6.0	39.64°C	0.867
	12.174V	5.058V	3.293V	5.063V	25.771				36.53°C	114.87V
40W	2.684A	0.692A	0.701A	0.296A	39.989	83.594%	0	<6.0	40.99°C	0.937
	12.177V	5.058V	3.293V	5.061V	47.836				37.7°C	114.87V
60W	4.148A	0.891A	0.903A	0.395A	59.989	85.458%	0	<6.0	41.99°C	0.962
	12.180V	5.047V	3.287V	5.058V	70.197				38.36°C	114.86V
80W	5.596A	1.091A	1.105A	0.495A	79.923	86.097%	0	<6.0	43.89°C	0.971
	12.205V	5.041V	3.284V	5.055V	92.83				39.92°C	114.85V

### RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	8.54mV	8.37mV	9.49mV	6.98mV	Pass
20% Load	9.77mV	8.98mV	9.39mV	7.34mV	Pass
30% Load	21.43mV	8.62mV	10.16mV	7.44mV	Pass
40% Load	13.35mV	8.93mV	10.67mV	9.24mV	Pass
50% Load	13.04mV	11.70mV	10.11mV	8.26mV	Pass
60% Load	12.94mV	11.60mV	10.42mV	8.31mV	Pass
70% Load	13.30mV	16.37mV	19.03mV	9.49mV	Pass
80% Load	13.14mV	23.04mV	13.44mV	11.85mV	Pass
90% Load	12.84mV	12.27mV	13.44mV	10.78mV	Pass
100% Load	20.43mV	10.74mV	14.04mV	12.75mV	Pass
110% Load	20.92mV	11.16mV	14.45mV	12.42mV	Pass
Crossload1	11.70mV	10.90mV	14.17mV	8.25mV	Pass
Crossload2	15.50mV	18.32mV	9.96mV	8.31mV	Pass
Crossload3	12.02mV	11.04mV	14.73mV	7.85mV	Pass
Crossload4	20.48mV	10.28mV	11.81mV	8.95mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case


# 230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

**PAGE 11/16**


#### EFFICIENCY GRAPH 230V

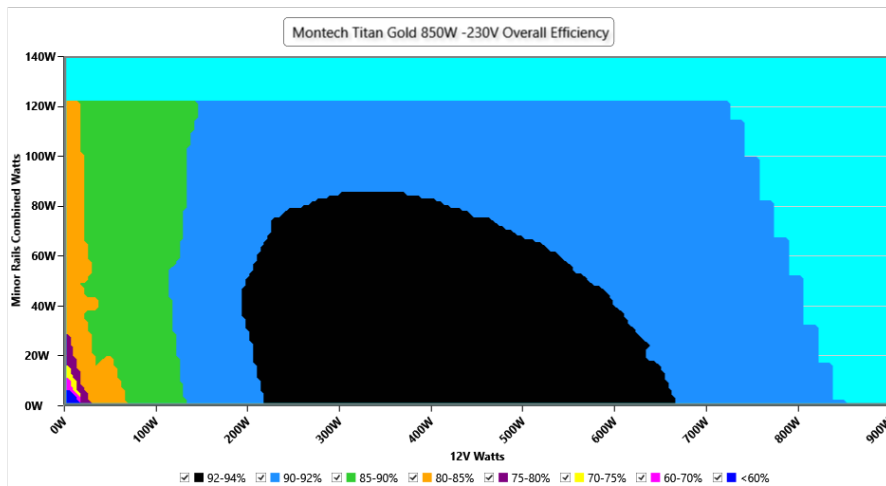

#### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

#### NOISE GRAPH 230V

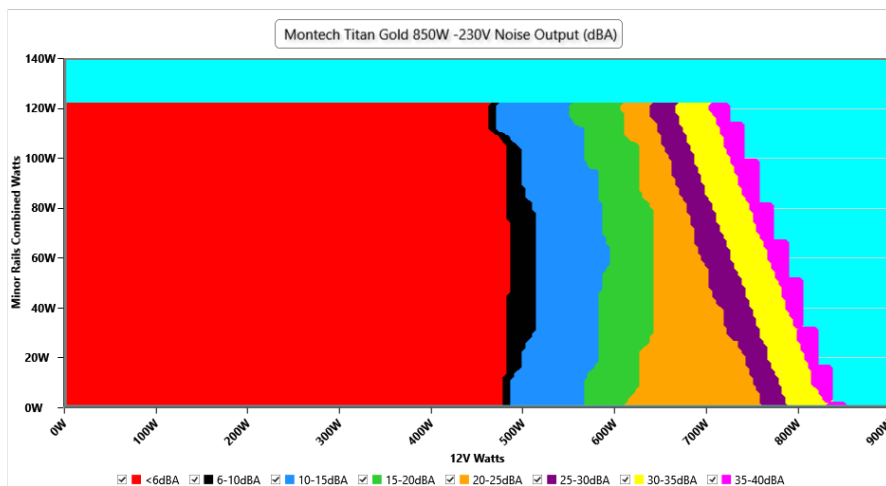

#### INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### VAMPIRE POWER -230V

#### Detailed Results

	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	229.90 V	229.84 V	227.70 V	229.92 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	50.00 Hz	49.50 Hz	50.00 Hz	50.50 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.13 %	0.12 %	N/A	0.16 %	2.00 %	PASS
Real Power:	0.069 W	0.056 W	N/A	0.085 W	N/A	N/A
Apparent Power:	34.759 W	34.737 W	N/A	34.783 W	N/A	N/A
Power Factor:	0.002	N/A	N/A	N/A	N/A	N/A

#### INFO

*This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing*

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### 10-110% LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	5.196A	1.983A	2.011A	0.991A	84.988	86.589%	0	<6.0	44.52°C	0.868
	12.200V	5.041V	3.281V	5.046V	98.154				40.23°C	229.89V
20%	11.394A	2.976A	3.02A	1.191A	169.896	90.587%	0	<6.0	45.34°C	0.941
	12.200V	5.04V	3.278V	5.037V	187.551				40.79°C	229.88V
30%	17.951A	3.472A	3.525A	1.374A	254.893	92.193%	0	<6.0	46.22°C	0.963
	12.191V	5.039V	3.276V	5.093V	276.477				41.13°C	229.86V
40%	24.557A	3.969A	4.032A	1.566A	339.973	92.76%	0	<6.0	47.25°C	0.973
	12.166V	5.039V	3.274V	5.107V	366.507				41.8°C	229.85V
50%	30.800A	4.962A	5.044A	1.765A	424.734	92.67%	407	<6.0	42.27°C	0.979
	12.151V	5.038V	3.271V	5.099V	458.33				48.32°C	229.83V
60%	37.039A	5.955A	6.057A	1.964A	509.279	92.38%	459	<6.0	42.46°C	0.982
	12.135V	5.038V	3.269V	5.092V	551.284				49.18°C	229.81V
70%	43.358A	6.949A	7.072A	2.164A	594.595	91.978%	702	17.5	43.23°C	0.985
	12.120V	5.037V	3.266V	5.084V	646.454				50.29°C	229.8V
80%	49.698A	7.943A	8.087A	2.265A	679.442	91.561%	884	25.2	43.71°C	0.986
	12.104V	5.036V	3.264V	5.078V	742.068				51.74°C	229.79V
90%	56.433A	8.44A	8.584A	2.366A	764.855	91.015%	1225	35.5	44.21°C	0.987
	12.092V	5.035V	3.261V	5.071V	840.366				53.25°C	229.77V
100%	62.868A	8.939A	9.112A	2.967A	849.667	90.435%	1515	41.2	45.8°C	0.988
	12.088V	5.034V	3.259V	5.056V	939.533				55.85°C	229.75V
110%	69.175A	9.935A	10.226A	2.97A	934.245	89.763%	1858	47.0	46.54°C	0.989
	12.085V	5.032V	3.256V	5.051V	1040.788				57.45°C	229.73V
CL1	1.965A	14.332A	14.585A	0.495A	146.411	85.543%	446	<6.0	41.19°C	0.936
	12.215V	5.038V	3.27V	5.045V	171.154				46.66°C	229.87V
CL2	1.964A	21.178A	1.006A	0.495A	136.41	84.438%	444	<6.0	41.22°C	0.93
	12.220V	5.035V	3.278V	5.051V	161.55				48.29°C	229.87V
CL3	1.964A	0.99A	20.717A	0.495A	99.092	81.458%	443	<6.0	40.55°C	0.9
	12.216V	5.05V	3.263V	5.046V	121.649				49.65°C	229.88V
CL4	69.411A	0.991A	1.011A	0.489A	849.799	91.135%	1311	37.8	44.73°C	0.988
	12.088V	5.043V	3.265V	5.107V	932.465				55.68°C	229.75V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### 20-80W LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.218A	0.494A	0.501A	0.198A	19.986	77.845%	0	<6.0	39.65°C	0.522
	12.176V	5.057V	3.293V	5.064V	25.673				36.56°C	229.89V
40W	2.684A	0.692A	0.701A	0.296A	39.987	84.154%	0	<6.0	40.72°C	0.704
	12.178V	5.057V	3.293V	5.061V	47.517				37.43°C	229.88V
60W	4.148A	0.891A	0.903A	0.395A	59.986	86.616%	0	<6.0	42.31°C	0.801
	12.181V	5.046V	3.287V	5.058V	69.256				38.75°C	229.88V
80W	5.594A	1.091A	1.105A	0.494A	79.912	86.718%	0	<6.0	43.05°C	0.858
	12.206V	5.04V	3.284V	5.056V	92.153				39.25°C	229.88V

### RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	9.41mV	9.34mV	9.03mV	7.39mV	Pass
20% Load	9.67mV	9.44mV	9.28mV	7.23mV	Pass
30% Load	24.95mV	8.78mV	10.11mV	7.70mV	Pass
40% Load	14.84mV	8.62mV	10.62mV	8.47mV	Pass
50% Load	12.68mV	8.88mV	10.62mV	7.70mV	Pass
60% Load	13.61mV	8.98mV	10.52mV	8.06mV	Pass
70% Load	11.97mV	15.14mV	18.62mV	9.03mV	Pass
80% Load	12.94mV	9.39mV	12.62mV	9.96mV	Pass
90% Load	13.35mV	10.16mV	12.72mV	10.06mV	Pass
100% Load	20.59mV	11.16mV	15.10mV	11.56mV	Pass
110% Load	21.15mV	10.77mV	14.71mV	12.02mV	Pass
Crossload1	10.87mV	10.40mV	13.18mV	7.87mV	Pass
Crossload2	15.45mV	17.29mV	9.60mV	7.90mV	Pass
Crossload3	11.40mV	9.85mV	16.52mV	7.34mV	Pass
Crossload4	19.19mV	9.72mV	11.60mV	8.65mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

**Anex**

**Montech Titan Gold 850W**



Top side



Power specifications label

**CERTIFICATIONS 115V**



**CERTIFICATIONS 230V**



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case